Analysis for Your Home Safety



Staining from Leaking Condensation

The condensation in your chimney is seeping through to the interior of your home, or your chimney exterior, and creating costly damage

Disintegrating Chimney Structure

Acidic moisture goes through freeze and thaw periods, expansion and contraction, creating cracks in your mortar and flue tiles

Poor Draft

You have an improper flue size matched to your heating appliance

☐ Tight Clearance

You have inadequate clearance to the wood framing of your home

□ Damaged Chimney Structure

Will allow carbon monoxide, smoke, and fire to enter your home

■ Down-Drafting & Smoke

If you have an improperly lined flue, you can expect an unsteady draft, leading to a down-ward flow, bringing smoke into your home

How Safe is Your Home?


Your Local M-Flex Dealer




ONE Solution

for every application


By having your chimney relined with the M-Flex 316L Stainless Steel Liner, you will not only increase the efficiency of your fuel burning appliance, but more importantly, you can rest assured that your chimney is safe for use.

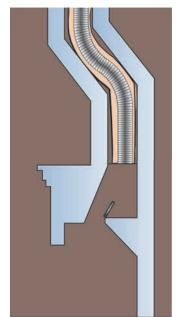

Fireplaces

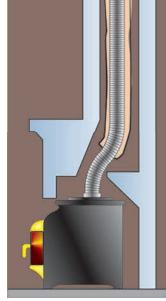

Fireplace Inserts

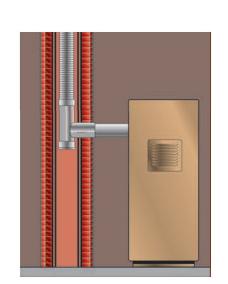

Wood and Pellet Stoves

Furnace and Water Heaters

Having your liner insulated with either

Premier Mix -- a poured insulation mixture,

or **Premier Wrap** -- a ceramic wool blanket helps create a steady draft and allows for zero clearance installation.



Realiz

Realizing the only way to truly control a product is to manufacture. We have invested in the industry by becoming the premier manufacturer of stainless steel liners and components to match.


We've Been Manufacturing M-Flex Stainless Steel And Aluminum Chimney Liner Systems Since 1992 and with the industry's largest variety

and with the industry's largest variety of sizes, alloys and custom chimney liners, we're eager to fulfill your chimney liner needs.







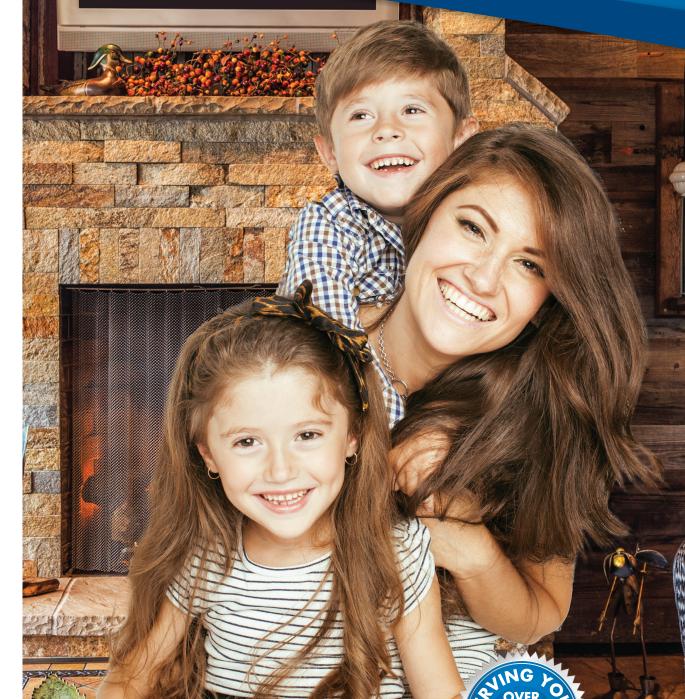



Why reline a chimney flue -especially when it looks fine?

The Interior is often dramatically different and in need of attention

Don't let damage & deterioration lead to hazardous conditions

Your perfect solution

The flue liner is often the most neglected part of your chimney. Traditional masonry flue tiles cannot handle the acidic moisture created by your furnace, boiler, or hot water tank. This acid attacks and breaks down flue tiles and mortar in between them. This damage can prevent harmful exhaust gases from leaving your chimney and

OIL HEATING APPLIANCES

When mixed with acidic condensation, soot buildup from your oil furnace and hot water tank on the walls of the chimney create sulfuric acid, which will deteriorate the clay flue tiles.

GAS HEATING APPLIANCES

Greater amounts of condensation produced by the high efficiency of newer heating appliances, combined with many installations in old oil furnace flues, speeds up deterioration. 2 cubic feet of water vapor is produced with

The Danger with creosote is the 450°F ignition point-consider the average wood stove produces gases leaving your fireplace at 300° F to 900° F-causing a chimney fire of up to 2100° F. If your chimney flue has no tiles, it is likely that these gases and creosote are leaking directly into your home, leading to a possible fire or creating carbon monoxide poisoning.

REAL STATISTICS

In 2001, an estimated 18,300 reported home structure fires involving chimneys supporting solid fueled equipment resulted in \$48 million in direct property damage. (NFPA)



SAFETY TIP

THE NATIONAL FIRE PROTECTION ASSOCIATION (in NFPA 211) says, "Chimneys, fireplaces, and vents shall be inspected at least once a year for soundness, freedom from deposits, and correct clearances. Cleaning, maintenance, and repairs shall be done if necessary."

No fireplace? Your furnace flue is responsible for venting deadly gases which can escape into your home through the tiniest of

CHIMNEY DEFECTS CAN RESULT

FIRE AND CARBON MONOXIDE

IN INJURY OR DEATH FROM

Having a fire start in your

chimney and rising to 2100°F

is extremely damaging and

dangerous to your family. It

fire once your chimney has

a crack or an ember igniting

doesn't take a lot to start a house

reached the threatening point of

catching fire. One spark through

the creosote and climbing your

chimney seeking an escape route

POISONING.

REAL STATISTICS

is often enough.

In 2001, 656 people died of unintentional non-fire exposure to gases... and there have been more than 30,000 hospital emergency room injuries per year. (NFPA)

Why wait to prevent something so dangerous to your family?

THE M-FLEX™ LINER IS AIR AND WATER TIGHT, LOCKING IN MOISTURE AND HAZARDOUS GASES — **EXHAUSTING THEM SAFELY OUT OF** YOUR HOME!

