



The most comfortable, most efficient, best looking stoves.



HearthStone Comfort	4
HearthStone Efficiency	6
HearthStone Style	8
The Soapstone Family	10
Mansfield	
Heritage	
Castleton	
Lincoln	
The Traditions Family	14
Manchester	
Shelburne	
Craftsbury	
The Green Mountain Family	18
Green Mountain 80 8681	
Green Mountain 80 8680	
Green Mountain 60	
Green Mountain 40	
Green Mountain 20	
The HASE family	22
Bari	
Bari Plus	
Wood Fireplace Inserts	26
Clydesdale	
Green Mountain Insert 90	
Green Mountain Insert 70	
Wood ZC Fireplaces	30
WFP 100	
WFP 75	
Deva Wood Cook Stove	33
Direct Vent Gas Stoves	34
Waitsfield	
Bristol	
Champlain	
Stowe	
Accessories	38





Pictured: Green Mountain 80 model 8681

Cover picture: Green Mountain 80 model 8681

HearthStone is:

The Most Comfortable.



Pictured: Heritage model 8024 in matte black

Long-Lasting, Comfortable Heat

Fully adjustable and easy to operate,
HearthStone stoves burn cleanly and steadily for hours.

Our gentle, even, long-lasting heat keeps your home
warm and inviting around the clock.

Up to 30hr* HeatLife™



* Under the right conditions, you will be able to
start a new fire with kindling up to the end of the
product's HeatLife™.

The Magic of Soapstone

Powerful Radiant Heat

Soapstone retains more heat than any other material. Once heated, it stays warm for hours.


The heat from soapstone is gentle, even, and comfortable. This powerful radiant heat warms the objects in your home, not just the air.



heatlife™

HearthStone stoves stay warmer for longer.

HeatLife™ is our way of measuring the total hours of usable heat from a single load of wood.

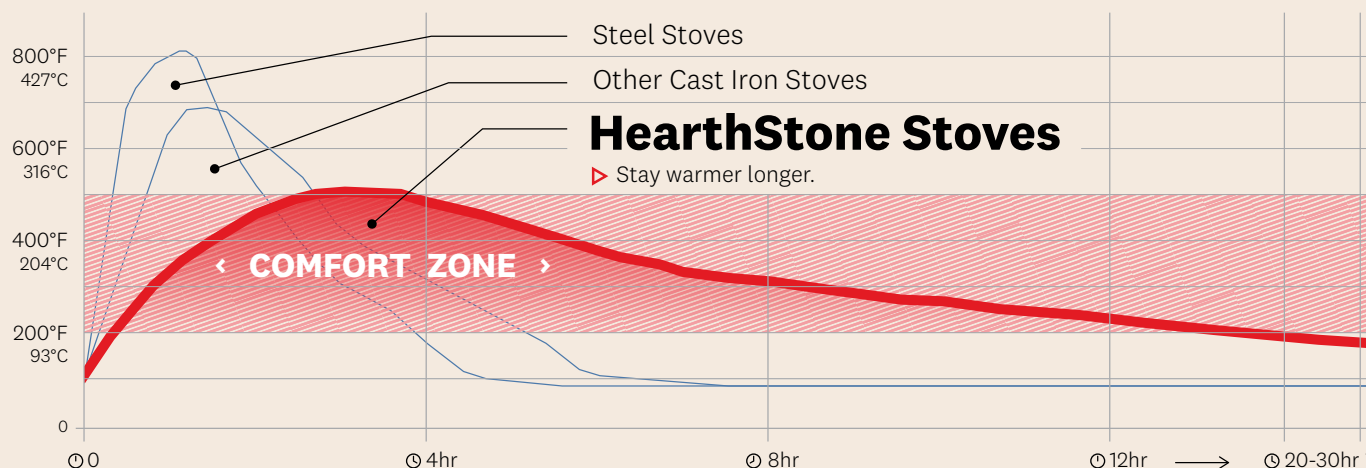

The HeatLife™ chart represents a single load of fuel burned under similar conditions.

* Burn times are dependent on the product model, installation, draft, wood type and moisture content, and air supply setting used.

HearthStone is:

The Most Efficient.



Pictured: Green Mountain 80 model 8681

Clean Combustion, High Efficiency

HearthStone is the leader in wood burning technology.

The TruHybrid™ system combines primary and secondary combustion with a tertiary combustion using a catalyst to achieve ultra clean combustion that surpasses 2020 EPA clean air standards.

ALL of our wood stoves use a fully adjustable system that allows you to burn high and hot, or low and slow to suit your heating needs while maintaining efficiency.

 up to **81%**


Overall efficiency (HHV)
on TruHybrid™ products.

TruHybrid™

Combustion Technology

Our beautiful and efficient fire is the result of the TruHybrid™ system.

- 1. Primary combustion** is the burning of the solid fuel, seen as flames on and around the wood.
- 2. Secondary combustion** is the burning of the gases the wood gives off, visible as flames dancing above the wood, below the baffle.
- 3. Tertiary combustion** takes place in the catalyst. Any remaining dust and gases are burned before going up the chimney.



[Learn More](#)



Get More Out Of Your Wood Pile

With a high-efficiency HearthStone stove, you burn less wood and keep your home warmer.

Clean Combustion



HearthStone TruHybrid™ stoves burn less wood while keeping your home warm.



High Efficiency

HearthStone's efficient stoves keep more heat in your home.




VS.

\$\$\$

Competitor's stoves need to burn more wood to heat the house.



Competitor's stoves are less efficient, losing more heat up the chimney.

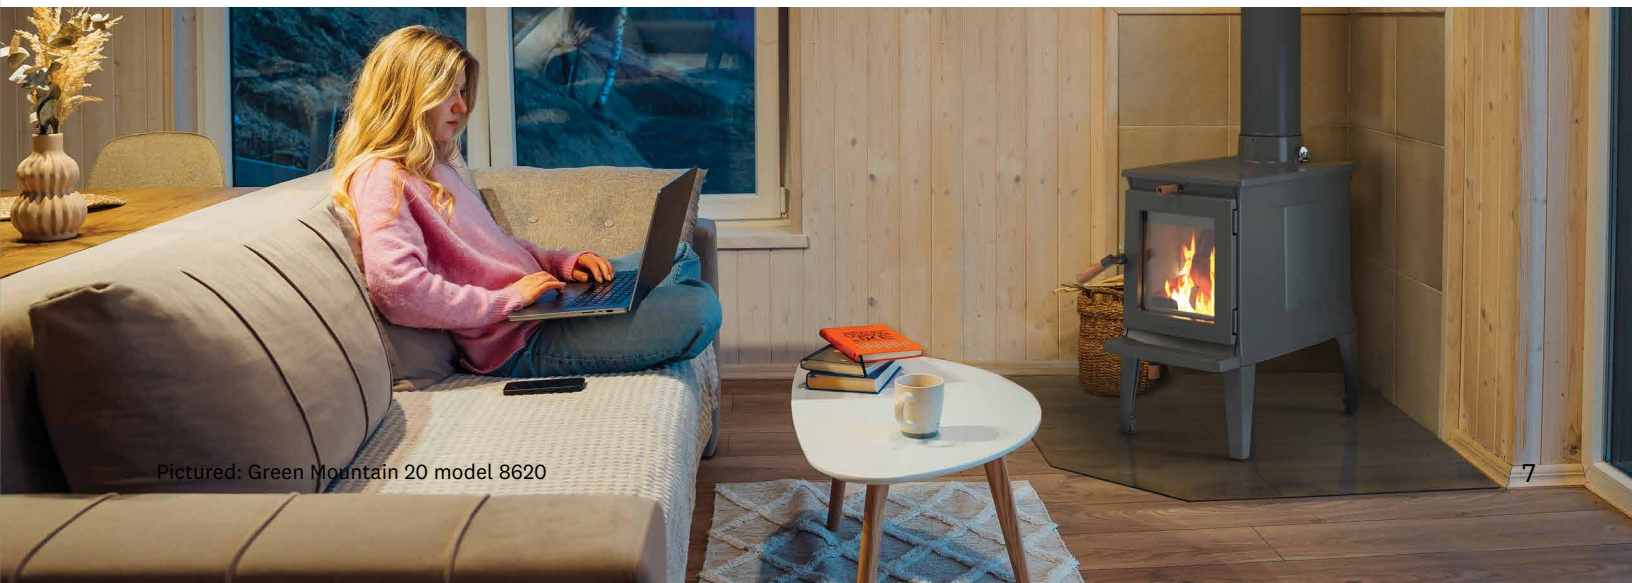

HearthStone is:

The Best Looking.




Pictured: Green Mountain 80 model 8681



Pictured: Manchester model 8362 in matte black



Pictured: Bari 8171 with lava ceramic panels

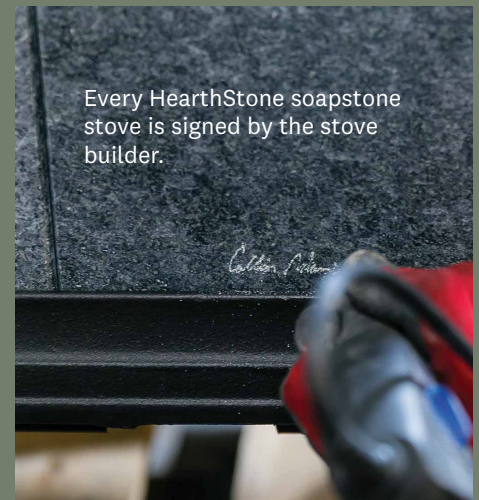

Every HearthStone soapstone stove is signed by the stove builder.



Quality & Style

Each HearthStone is handcrafted using a combination of European cast iron, heating grade soapstone, precision-made steel, and engineered ceramics. Our commitment to quality and attention to detail ensure that your product will serve you faithfully for decades.

A Stove For Every Style

From traditional to modern, HearthStone has a perfect product for your home. We build our product lines to offer various sizes in each style. Just choose the look you like, and we're sure to have the right size stove to heat the space you need.



Pictured: Green Mountain 60 model 8660



The Soapstone Family

- TruHybrid™ wood burning stoves
- Soapstone & cast iron construction
- Enamel finish options



The Traditions Family

- TruHybrid™ wood burning stoves
- Cast iron with soapstone lining
- Enamel finish options



The Green Mountain Family

- TruHybrid™ wood burning stoves
- Cast iron with soapstone lining
- Matte black finish



The HASE Family

- TruHybrid™ wood burning stoves
- Steel construction
- Ceramic, soapstone, or steel panels



Wood Fireplace Inserts

- Wood burning fireplace inserts
- Cast iron & steel construction
- Enamel finish option



Wood ZC Fireplaces

- Wood burning fireplaces
- Cast iron & steel construction
- Enamel finish option



Wood Cook Stove

- Wood burning cook stove
- Cast iron & steel construction
- Wood heated cook top and oven



Direct Vent Gas Stoves

- Gas burning stoves, NG or LP
- Cast iron & steel construction
- Enamel finish options



The most comfortable, most efficient, best looking products.



Wood Stoves

The Soapstone Family

HearthStone's soapstone wood stoves combine timeless craftsmanship with cutting-edge efficiency, delivering unmatched warmth and beauty to any home. The elegant designs, paired with durable cast iron construction, make them both a stunning focal point and the ideal heating solution.

Experience the perfect blend of tradition, innovation, and lasting comfort with HearthStone.



Pictured: Heritage model 8024 in black enamel

Constructed in soapstone
& cast iron with enamel
finish options.





Specifications

Mansfield 8013

Heritage 8024

Castleton 8031

Lincoln 8060

Combustion Technology

TruHybrid™

TruHybrid™

TruHybrid™

TruHybrid™

HHV Efficiency

78%

77%

77.3%

78.5%

HeatLife™*

Up to 30 hours

Up to 25 hours

Up to 20 hours

Up to 9.5 hours

EPA Certified

0.54 g/hr

1.1 g/hr

0.98 g/hr

1.14 g/hr

Heats up to

2,500 sq ft

2,000 sq ft

1,500 sq ft

575 sq ft

Firebox Capacity

3.2 cu ft

2.2 cu ft

1.9 cu ft

1.0 cu ft

BTU

Up to 80,000

Up to 60,000

Up to 45,000

Up to 23,000

Maximum Log Length

21" Left-Right

21"

18"

18"

Flue Exit & Diameter

Top or Rear - 6"

Top or Rear - 6"

Top or Rear - 6"

Top - 6"

Side Load Door

N/A

Left or Right

N/A

N/A

Ash Pan

Optional

Optional

N/A

N/A

Weight

605 lbs

535 lbs

475 lbs

245 lbs

Dimensions W x D x H

28½" x 27¼" x 30¼"

28½" x 21½" x 30¼"

25½" x 24" x 25½"

14" x 24½" x 25½"

Accessories

Ash Pan

90-54240

90-54240

N/A

N/A

Rear Heat Shield

90-68210

90-68210

90-68300

90-68601

Side Heat Shield

N/A

N/A

N/A

90-68605

Convection Blower

90-57210

90-57210

90-57210

N/A

Outside Air Adapter

90-53220

90-53220

90-53300

96-53400

Finish Options

Matte Black



Brown Enamel



Seafoam Enamel



Black Enamel



Blue-Black Enamel



Clearances

Single-wall connector pipe no rear heat shield -----

Side / Rear / Corner

23" / 19" / 14"

16" / 16" / 8"

17" / 15"* / 8"

Double-wall, no shields

22" / 9" / 13.75"

Double-wall connector pipe with rear heat shield -----

Side / Rear / Corner

23" / 6" / 14"

16" / 6" / 8"

17" / 8" / 8"

Double, Side & Rear shields

9" / 3.5" / 7.25"

Hearth Pad: Ember Protection Only

USA - Width x Depth

34" x 40"

47" x 39"

31½" x 37"

27½" x 37½"

Canada - Width x Depth

41" x 49½"

50½" x 42"

41" x 47"

30" x 47½"

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.

* Single-wall connector pipe generally requires 18 inches of clearance.



Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.



EPA Certified Room Heaters • Made in Vermont

Lincoln 8060



Efficiency:
78.5% HHV



HeatLife™:
9.5 Hours



EPA Certified:
1.14 g/hr



Mansfield 8013



Efficiency:
78% HHV



HeatLife™:
30 Hours



EPA Certified:
0.54 g/hr



The Magic of Soapstone

Our soapstone stoves radiate a slow powerful heat to keep your home warmer for longer.



Heritage
8024

Efficiency:
77% HHV

HeatLife™:
25 Hours

EPA Certified:
1.1 g/hr



Castleton
8031

Efficiency:
77.3% HHV

HeatLife™:
20 Hours

EPA Certified:
0.98 g/hr



Clean & Efficient

The TruHybrid™ system uses a catalyst to achieve ultra clean combustion.



Wood Stoves

The Traditions Family

Our Traditions Family combines timeless craftsmanship with modern heating efficiency. Built with the highest-quality European cast iron and lined with soapstone, these stoves provide long-lasting, radiant heat while enhancing any living space with their classic design.

Whether you're looking for a cozy centerpiece or a dependable heat source, HearthStone's Traditions stoves offer superior performance and the charm of a traditional wood fire.



Pictured: Manchester 8362 in brown enamel

European cast iron with brown enamel, basil enamel, or matte black finish options and thick soapstone lining.





Specifications

	Manchester 8362	Shelburne 8372	Craftsbury 8392
Combustion Technology	TruHybrid™	TruHybrid™	TruHybrid™
HHV Efficiency	78%	79%	79%
HeatLife™*	Up to 30 hours	Up to 24 hours	Up to 16 hours
EPA Certified	0.65 g/hr	0.6 g/hr	1.07 g/hr
Heats up to	2,400 sq ft	2,000 sq ft	1,400 sq ft
Firebox Capacity	2.45 cu ft	2.0 cu ft	1.32 cu ft
BTU	Up to 75,000	Up to 60,000	Up to 40,000
Maximum Log Length	24"	18"	16"
Flue Exit & Diameter	Top or Rear - 6"	Top or Rear - 6"	Top or Rear - 6"
Side Load Door	Left side	N/A	N/A
Ash Pan	Built in	N/A	N/A
Weight	520 lbs	385 lbs	350 lbs
Dimensions W x D x H	30 ¹ / ₈ " x 21 ¹ / ₈ " x 30 ³ / ₈ "	26 ³ / ₈ " x 22 ³ / ₈ " x 29 ⁷ / ₈ "	23 ³ / ₄ " x 20 ¹ / ₄ " x 28 ³ / ₄ "

Accessories

Rear Heat Shield	93-68600 (close clearance)	Included, simple	Included, simple
Convection Blower	93-57600	96-57400, w/ heat shield	96-57400, w/ heat shield
Outside Air Adapter	93-53500	96-53400	96-53400

Finish Options

Matte Black			
Brown Enamel			
Basil Enamel			

Clearances

Single-wall connector pipe »»	No close clearance heat shield	Included shield removed -----	
Side / Rear / Corner	18" / 16" / 9"	13" / 17 ¹ / ₂ " / 10"	14" / 16" / 14"
Single-wall connector pipe with included rear heat shield			
Side / Rear / Corner	N/A	13" / 11" ⁺ / 7"	14" / 13 ³ / ₄ " ⁺ / 7"
Double-wall connector pipe »»	With close clearance heat shield	With blower & heat shield -----	
Side / Rear / Corner	16" / 6" / 9"	13" / 5" / 7"	14" / 9 ³ / ₄ " / 7"

Hearth Pad: Ember Protection Only

USA - Width x Depth	48" x 36 ³ / ₄ "	33 ¹ / ₄ " x 33 ¹ / ₂ "	31 ¹ / ₂ " x 33"
Canada - Width x Depth	56" x 44"	42" x 43 ¹ / ₂ "	40" x 43"

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.

* Single-wall connector pipe generally requires 18 inches of clearance.



Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.



EPA Certified Room Heaters • Made in Vermont

Shelburne 8372



Efficiency:
79% HHV



HeatLife™:
24 Hours



EPA Certified:
0.6 g/hr



Craftsbury 8392



Efficiency:
79% HHV



HeatLife™:
16 Hours



EPA Certified:
1.07 g/hr



Long-Lasting Comfort 

HearthStone stoves ensure your home stays warm and inviting around the clock.



Manchester
8362

Efficiency:
78% HHV

HeatLife™:
30 Hours

EPA Certified:
0.65 g/hr

TruHybrid™ Efficiency

The beautiful and efficient fire is the result of our TruHybrid™ combustion technology.



Wood Stoves


The Green Mountain Family

Designed with a perfect mix of tradition and modern elegance, our Green Mountain wood stoves complement any home's aesthetic. Crafted with premium European cast iron and lined with soapstone, these stoves offer not only durability but also exceptional heat retention for long-lasting, even warmth. Experience the beauty and efficiency of Hearthstone—where craftsmanship meets comfort.



Pictured: Green Mountain 40 model 8640

The Green Mountain Stoves have a traditional black finish that highlights the clean modern style of the cast iron. Soapstone lining adds the HearthStone HeatLife™ to keep your home cozy.

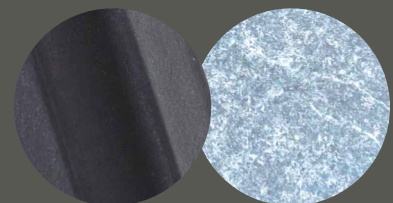



Specifications	GM80 8681	GM80 8680	GM60 8660	GM40 8640	GM20 8620
Combustion Technology	TruHybrid™	TruHybrid™	TruHybrid™	TruHybrid™	TruHybrid™
HHV Efficiency	80%	81%	79%	79%	78.5%
HeatLife™*	Up to 30 hours	Up to 30 hours	Up to 24 hours	Up to 16 hours	Up to 9.5 hours
EPA Certified	0.53 g/hr	0.7 g/hr	0.6 g/hr	1.07 g/hr	1.14 g/hr
Heats up to	2,500 sq ft	2,500 sq ft	2,000 sq ft	1,400 sq ft	575 sq ft
Firebox Capacity	3.16 cu ft	3.1 cu ft	2.0 cu ft	1.32 cu ft	1.0 cu ft
BTU	Up to 80,000	Up to 80,000	Up to 60,000	Up to 40,000	Up to 23,000
Maximum Log Length	23"	23"	18"	16"	18"
Flue Exit & Diameter	Top or Rear - 6"	Top - 8"	Top - 6"	Top - 6"	Top - 6"
Weight	550 lbs	550 lbs	405 lbs	350 lbs	285 lbs
Dimensions W x D x H	29½" x 25" x 31"	29½" x 24½" x 31"	26" x 21¼" x 29⅞"	23¼" x 19¾" x 28¾"	14¾" x 25½" x 25½"
Accessories					
Blower w/ Rear Heat Shield	N/A	96-57800	96-57400	96-57400	N/A
Rear Heat Shield	5968-011	N/A	N/A	N/A	96-68200
Side Heat Shield	N/A	N/A	N/A	N/A	96-68205
Blower Kit	96-57801	N/A	N/A	N/A	N/A
Outside Air Adapter	96-53400	96-53400	96-53400	96-53400	96-53400
Finish Options					
Matte Black					
Clearances					
Single-wall connector pipe no rear heat shield	Included heat shield removed -----				
Side / Rear / Corner	17.5" / 15.5" / 7.5"	N/A	13" / 17½" / 10"	14" / 16" / 14"	13¾" / 10" / 9½" USA 13¾" / 15¼" / 12½" CAN
Single-wall connector pipe with rear heat shield					
Side / Rear / Corner	17.5"/5.5"/7.5" USA 17.5"/15.5"/7.5" CAN	13" / 8" / 7"	13" / 11" / 7"	14" / 13¾" / 7"	Double, no heat shields 13¾" / 9" / 9½"
Double-wall connector pipe with rear heat shield	Optional blower heat shield and blower installed -----				
Side / Rear / Corner	17.5" / 3.5" / 7.5"	13" / 5" / 7"	13" / 5" / 7"	14" / 9¾" / 7"	Double, Side & Rear shields 9" / 3½" / 4"
Hearth Pad: Ember Protection Only					
USA - Width x Depth	41½" x 40"	41½" x 40"	33¾" x 33½"	31½" x 33"	27½" x 37½"
Canada - Width x Depth	45" x 50"	45" x 50"	42" x 43½"	40" x 43"	30⅝" x 47½"
* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.					
* Single-wall connector pipe generally requires 18 inches of clearance.					

Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.



EPA Certified Room Heaters • Made in Vermont

GM20

8620



Efficiency:
78.5% HHV



HeatLife™:
9.5 Hours



EPA Certified:
1.14 g/hr



GM40

8640



Efficiency:
79% HHV



HeatLife™:
16 Hours



EPA Certified:
1.07 g/hr



Quality & Style 

Our attention to detail ensures that your product will serve you faithfully for decades.



 The Most Efficient Wood Stoves

With efficiencies up to 81%, HearthStone is the leader in wood burning technology.




Wood Stoves

The HASE Family


A stunning fusion of modern European design and high-performance heating, the HASE stoves are expertly crafted by HASE in Trier, Germany. With its sleek cylindrical shape and a variety of luxurious finish options—including ceramic, steel, and soapstone—the Bari complements any contemporary living space.

The stove rotates smoothly and easily so you can enjoy the fire as you move around your home.

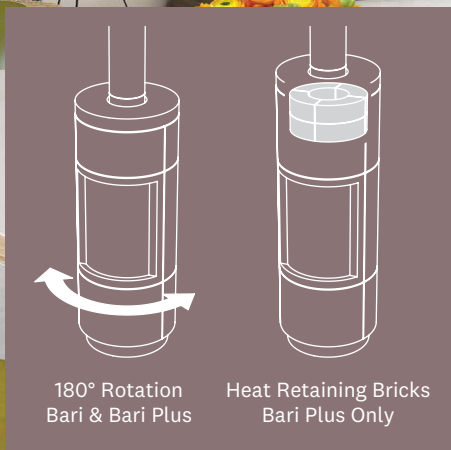

Pictured: Bari model 8171 with meteorite ceramic panels

Sleek steel, designer ceramics, or natural soapstone transform our modern stoves to suit your aesthetic.

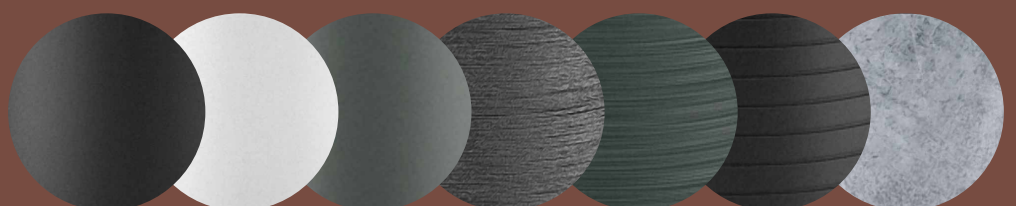



Specifications

Bari 8171

Bari Plus 8172

Combustion Technology
HHV Efficiency
HeatLife™*
EPA Certified
Heats up to
Firebox Capacity
BTU
Maximum Log Length
Flue Exit & Diameter
Ash Pan
Stove Rotation
Heat Retaining Bricks
Weight
Dimensions W x D x H

TruHybrid™
76%
Up to 14 hours
0.94 g/hr
1,400 sq ft
1.25 cu ft
Up to 35,000
17" Vertically
Top - 6"
Built in
180°, fire visible up to 225°
N/A
310-485 lbs
18½" x 18½" x 48¾"

TruHybrid™
76%
Up to 16 hours
0.94 g/hr
1,400 sq ft
1.25 cu ft
Up to 35,000
17" Vertically
Top - 6"
Built in
180°, fire visible up to 225°
Included
425 lbs
18½" x 18½" x 54⅝"

Accessories

Outside Air Adapter

91-53712

91-53712

Finish Options

Charcoal Steel
Alabaster Ceramic
Fjord Ceramic
Meteorite Ceramic
Wintersea Ceramic
Lava Ceramic
Soapstone



Clearances

Single or double wall connector pipe, stove free to rotate

Side / Rear

38" / 13"

38" / 13"

Single or double wall connector pipe, stove locked in position

Side / Rear / Corner

13" / 11"+ / 10"

13" / 11"+ / 10"

Hearth Pad: Ember Protection Only

USA, rotation locked - W x D
USA, free to rotate - W x D
Canada, locked - W x D
Canada, rotating - W x D

29" x 35"
51" x 39½"
35" x 43½"
55" x 43½"

29" x 35"
51" x 39½"
35" x 43½"
55" x 43½"

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.

* Single-wall connector pipe generally requires 18 inches of clearance.



Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.



EPA Certified Room Heaters • Made in Vermont



All finishes are available for the Bari wood stove, model 8171.

Additional finish options are available by special order. See the HASE Lima stove to configure a custom color using the QR code to the right:



Charcoal Steel



Charcoal Steel,
Soapstone Top



Alabaster Ceramic,
Smooth



Fjord Ceramic,
Smooth



Meteorite Ceramic,
Linear Texture



Wintersea Ceramic,
Linear Texture



Lava Ceramic,
Ringed Texture



Soapstone

The Right Look For Every Home 

Choose from a variety of different materials, colors, and textures to match the style of your living space.



Bari
8171

↗
Efficiency:
76% HHV

🔥
HeatLife™:
14 Hours

🌿
EPA Certified:
0.94 g/hr



Bari Plus
8172

↗
Efficiency:
76% HHV

🔥
HeatLife™:
16 Hours

🌿
EPA Certified:
0.94 g/hr

Modern & Efficient

The fully adjustable TruHybrid™ combustion system burns efficiently on any setting.



Wood Fireplace Inserts

Fireplace Inserts


Transform your existing fireplace with HearthStone's wood fireplace inserts, bringing modern efficiency and style to your living room. Whether you're upgrading for style, sustainability, or savings, HearthStone's wood inserts deliver the perfect balance of beauty, warmth, and performance.

Experience the timeless charm of a wood fire—reimagined for today.



Pictured: Green Mountain Insert 90 model 8460 in matte black

European cast iron in either classic black or a dark brown enamel present a beautiful and efficient fire in our soapstone lined inserts.

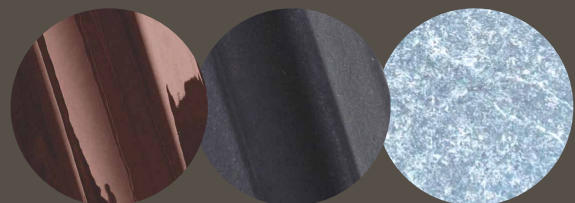



Specifications	Clydesdale 8492	Green Mountain Insert-90 8460	Green Mountain Insert-70 8450
Combustion Technology	TruHybrid™	Non-catalytic	Non-catalytic
HHV Efficiency	79%	64%	69%
HeatLife™*	Up to 24 hours	Up to 8 hours	Up to 10 hours
EPA Certified	1.16 g/hr	1.22 g/hr	1.54 g/hr
Heats up to	2,000 sq ft	2,200 sq ft	2,000 sq ft
Firebox Capacity	2.4 cu ft	2.5 cu ft	2.4 cu ft
BTU	Up to 60,000	Up to 80,000	Up to 70,000
Maximum Log Length	22"	20"	20"
Flue Exit & Diameter	6", 2 positions	6"	6"
Convection Blower	Included	Included	Included
Weight	550 lbs	440 lbs	428 lbs
Min. Fireplace Dims W x D x H	32½" x 13"-17" x 23¼"	31¾" x 22⅜"† x 27⅜"	29" x 16"*-20" x 24"
Surround Coverage W x H	47⅞" x 30⅝"	50" x 34½" Arched	45⅝" x 31⅝" Arched
Accessories			
Mantel Shield	94-79700	94-79700	94-79700
Surround Extension	94-5990010 (Increase WxH)	94-5960110 (Reduce Min. Depth)	94-5950010 (Reduce Min. Depth)
Surround Base Caps	94-5970610/20	N/A	N/A
Steel Surround	N/A	94-5960010	94-5950110
Surround Lower Panel	N/A	N/A	94-5950510
Outside Air Adapter Kit	N/A	94-53500	94-53500
Fire Screen Insert	N/A	94-69110	94-69500
Liner Hook-up Collar	N/A	94-67500	94-67500
Finish Options			
Matte Black			
Brown Enamel			
Clearances			
Combustible Mantel / Shielded Mantel			
From bottom of insert	39½" / 33⅝" (8" mantel)	40¾" / 40¾"	50" / 50"
To Side Trim / To Side Wall			
From side of insert body	8" / 11"	9½" / 19"	9" / 16"
Hearth Protection			
Hearth Protection	Hearth less than 7" tall: R-value 1.5**	Ember Protection Only	Hearth less than 5" tall: R-value 1.0***
USA - Width x Depth	38" x 16"	41½" x 16"	36" x 16"
Canada - Width x Depth	47" x 18"	48" x 18"	43" x 18"
* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™. Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.			
	 ** Hearths over 7" tall: Ember protection only.	 † 18⅝" with optional surround extension.	 * 16" with surround extension. *** Hearths over 5" tall: Ember protection only.



EPA Certified Room Heaters • Made in Vermont

Clydesdale
8492



Efficiency:
79% HHV



HeatLife™:
24 Hours



EPA Certified:
1.16 g/hr



Enjoy The Heat From Your Fireplace 

Our inserts direct the heat from the fire into your home instead of letting it escape up the chimney.




GMI-90
8460

Efficiency:
64% HHV

HeatLife™:
8 Hours

EPA Certified:
1.22 g/hr

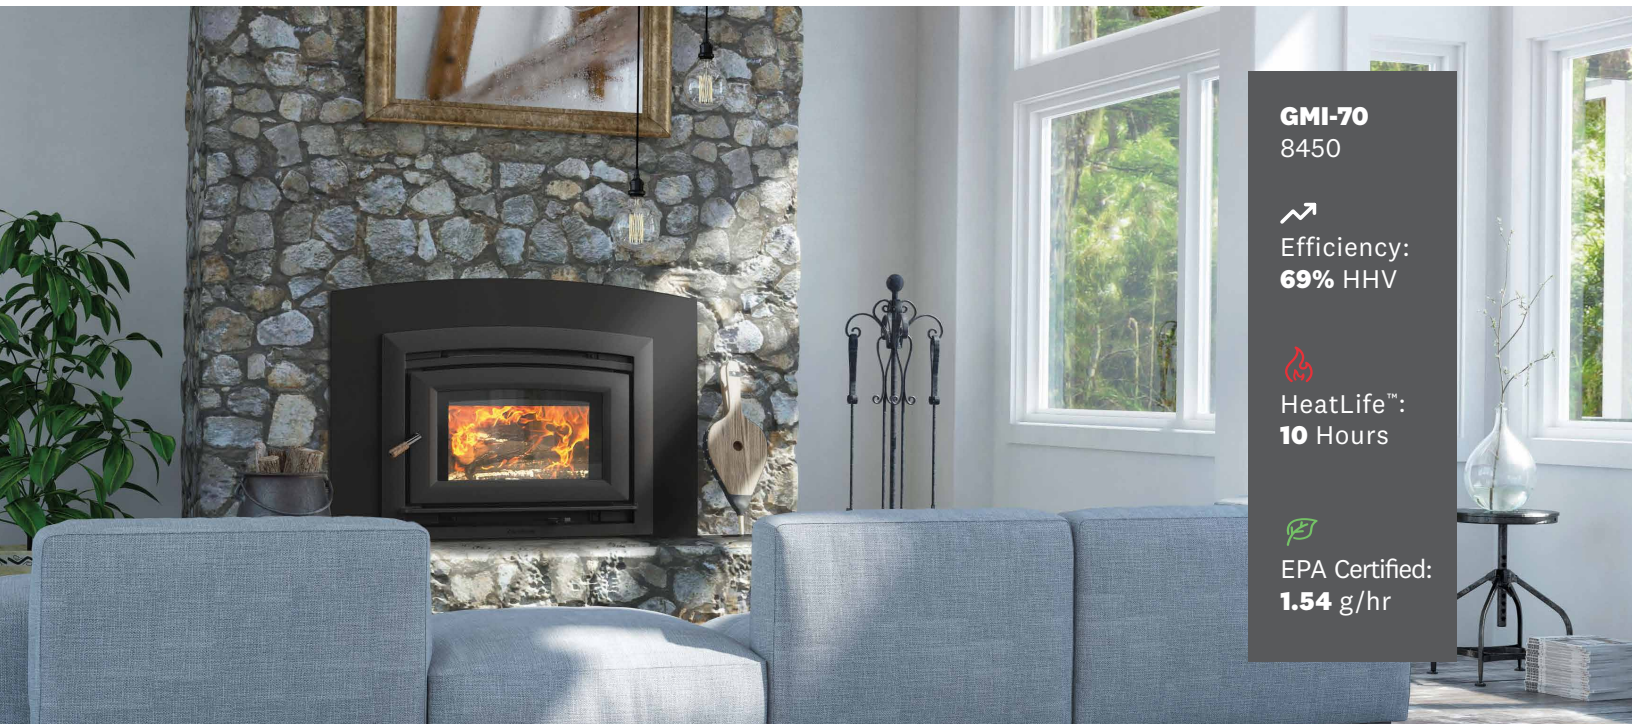

GMI-70
8450

Efficiency:
69% HHV

HeatLife™:
10 Hours

EPA Certified:
1.54 g/hr

Clean, Efficient Combustion

Fireplace inserts are far more efficient than traditional fireplaces, controlling combustion for a clean burn.



Wood ZC Fireplaces

Zero Clearance Fireplaces

HearthStone's Zero Clearance Fireplaces deliver the warmth and ambiance of a traditional hearth with modern wood-burning efficiency. Engineered for installation in new construction or renovations, these fireplaces provide powerful heat while maintaining an eco-friendly footprint.

With our distinctive textured cast iron look, HearthStone's ZC Fireplaces offer the perfect balance of beauty and performance.



Pictured: WFP-100 model 8420 in brown enamel

Our Fireplace facades are made from European cast iron with a distinctive chiseled stone texture, available in either a matte black or brown enamel finish.





Specifications

	WFP-100 8420	WFP-75 8411
Combustion Technology	Non-catalytic	Non-catalytic
HHV Efficiency	64%	68%
HeatLife™*	Up to 10 hours	Up to 9 hours
EPA Certified	1.6 g/hr	1.14 g/hr
Heats up to	2,800 sq ft	2,200 sq ft
Firebox Capacity	4.28 cu ft	2.5 cu ft
BTU	Up to 95,000	Up to 80,000
Maximum Log Length	25"	20"
Flue Exit & Diameter	8"	6"
Convection Blower	Included	Included
Weight	665 lbs	400 lbs
Face Dimensions W x H	45¼" x 41½" Arched	35½" x 37" Arched

Accessories

Hot Air Circulation Kit	94-99200	N/A
Forced Hot Air Kit	94-57200	94-57110
Hot Air Distribution Kit	N/A	94-99100
Hot Air Dist. Kit, Modern	N/A	94-99110
Mantel Shield	N/A	94-79700
Fire Screen	N/A	94-69110

Finish Options

Matte Black
Brown Enamel



Clearances

Bottom of the fireplace to ceiling	84"	80"
Bottom of the fireplace to mantel	N/A	58"
Door opening to side trim	8"	8"
Door opening to side wall	24"	13"

Hearth Protection

	Hearth less than 12" tall: R-value 2.0	Hearth height 4" or less: R-value 1.0***
--	---	---

USA & Canada Width x Depth

49" x 32"

41½" x 16"

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.

Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.





EPA Certified Room Heaters • Made in Vermont

ZC Fireplaces



WFP-75

8411



Efficiency:
68% HHV



HeatLife™:
9 Hours



EPA Certified:
1.14 g/hr



WFP-100

8420



Efficiency:
64% HHV



HeatLife™:
10 Hours



EPA Certified:
1.6 g/hr

Long-Lasting Comfort 

HearthStone fireplaces ensure your home stays warm and inviting around the clock.



Deva Wood Cook Stove



A full service range powered by wood, the Deva is perfect for living off-grid.



Baking Oven

The ample oven is constructed from stainless steel, equipped with racks, and large enough to cook a 20 pound turkey.

Ceramic glass cook top

The ceramic glass cooking surface is easy to clean, scratch resistant, and spacious enough for a number of pots and pans.

Temperature control

Keep a consistent temperature when baking by adjusting a simple control which regulates the amount of hot air circulating around the oven.

Clearances

Single wall connector pipe, top exit, Side / Rear	10" / 16"
Single wall connector pipe, rear exit, Side / Rear	4" / 16"
Double wall connector pipe, top exit, Side / Rear	4" / 14"
Double wall connector pipe, rear exit, Side / Rear	4" / 16"



Specifications

Firebox Capacity	1.6 cu ft
BTU	Up to 46,000
EPA Rating	Exempt
Maximum Log Length	17"
Flue Exit & Diameter	Top or Rear - 6"
Oven Capacity	2.5 cu ft
Ash Pan	Included
Weight	484 lbs
Dimensions W x D x H	40" x 23¾" x 33¾"

Finish Options

Black Enamel	
--------------	--

Hearth Protection:

USA - W x D	56" x 39¾"
Canada - W x D	56" x 41¾"

Deva 8220

R-value 0.89

Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.



DV Gas Stoves

Direct Vent Gas Stoves

HearthStone's gas-fired direct vent freestanding stoves offer the perfect blend of elegance, efficiency, and ease of use. Designed to provide cozy, radiant warmth with the push of a button, these stoves feature beautiful cast iron craftsmanship and realistic flame displays that create an inviting ambiance.

Whether you're looking for a stunning centerpiece or a reliable heating solution, HearthStone's gas stoves deliver the charm of a traditional fire with the convenience of modern gas technology.



Pictured: Waitsfield DX model 8770 in basil enamel

European cast iron, finished in your choice of brown, basil, or oyster enamel, or traditional matte black.





Specifications	Waitsfield DX 8770	Bristol DX 8763	Champlain 8304	Stowe 8325
Heats up to	1,800 sq ft	1,400 sq ft	1,800 sq ft	1,200 sq ft
Steady State Efficiency	77.4%	73.2%	74.6%	80.1%
P.4.1.09 Efficiency	70.0%	68.2%	67.9%	75.7%
Burn Rate NG	18,000 - 37,000 BTU/hr	18,000 - 26,000 BTU/hr	21,000 - 35,000 BTU/hr	15,000 - 22,400 BTU/hr
Burn Rate LP	16,000 - 37,000 BTU/hr	16,000 - 26,000 BTU/hr	21,000 - 35,000 BTU/hr	15,000 - 22,400 BTU/hr
Venting	Top, 4" x 6 $\frac{5}{8}$ " DV	Top, 4" x 6 $\frac{5}{8}$ " DV	45°, 4" x 6 $\frac{5}{8}$ " DV	45°, 4" x 6 $\frac{5}{8}$ " DV
Ignition System	Maxitrol GV60	Maxitrol GV60	SIT 820, 7 day timeout	SIT 820, 7 day timeout
Burner	2-Stage Ceramic	Ceramic Burner	Steel Pan Burner	Ceramic Burner
Cast Iron Heat Exchanger	Integral	Integral	Integral	Integral
Convection Blower	Included	Included	Optional	Optional
Remote Control	Included	Included	Optional	Optional
Safety Barrier	Integral	Integral	Integral	Integral
LP Conversion Kit	Included	Included	Included	Included
Mobile Home Certified	Yes	Yes	Yes	Yes
Weight	215 lbs	170 lbs	220 lbs	155 lbs
Dimensions W x D x H	26" x 21 $\frac{1}{4}$ " x 26 $\frac{3}{8}$ "	22 $\frac{1}{2}$ " x 19 $\frac{1}{4}$ " x 26 $\frac{3}{8}$ "	26 $\frac{1}{2}$ " x 21 $\frac{3}{8}$ " x 28 $\frac{3}{8}$ "	22 $\frac{3}{8}$ " x 18 $\frac{1}{2}$ " x 26"
Accessories				
Wall Touch Pad	7000-260	7000-260	N/A	N/A
Convection Blower	N/A	N/A	93-57020	93-57230
Remote Control Kit	N/A	N/A	90-56914	90-56914
Finish Options				
Matte Black				
Brown Enamel				
Basil Enamel				
Oyster Enamel				
Clearances				
Side / Rear / Corner	16" / 2" / 11"	10" / 2" / 4"	2"* / 3" / 4" * 4" with snorkel termination	4"* / 3" / 4" ** 6" with side walls deeper than 18"
Floor Protection				
Non-combustible surface or wood floor -----				
Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.				



Certified Gas-Fired Direct Vent Heaters • Made in Vermont

Waitsfield DX 8770



Efficiency:
77.4% SSE
70.0% P4



NG:
18k-37k
BTU/hr

LP:
16k-37k
BTU/hr



Bristol DX 8763



Efficiency:
73.2% SSE
68.2% P4



NG:
18k-26k
BTU/hr

LP:
16k-26k
BTU/hr



Easy, On-Demand Comfort 

Enjoy the warmth and ambiance of a burning fire that lights with the push of a button.



Champlain
8304



Efficiency:
74.6% SSE
67.9% P4



NG:
21k-35k
BTU/hr
LP:
21k-35k
BTU/hr



Stowe
8325



Efficiency:
80.1% SSE
75.7% P4



NG:
15k-22.4k
BTU/hr
LP:
15k-22.4k
BTU/hr

Modern & Efficient

All of our gas stoves incorporate a cast iron heat exchanger to radiate more heat into your home.



Wood Stove Accessories

Learn more about the accessories that fit your specific product, including installation instructions.



Heat Shields

Heat shields reduce clearances so you can install your stove closer to the wall.



Convection Blowers

Blowers help circulate the air around your stove, moving more heat into your living space.



Ash Pans

Select stove models can be equipped with an ash pan to help manage cleaning the ashes out of your stove.



Outside Air Kits

Recommended for airtight homes, these kits bring fresh air into your stove from outside the home.

These general accessories are useful for installing and living with your wood stove:



Soapstone Steamer 90-99112

Fill the steamer pot with water and set it on your stove to help balance the drying effects of a wood fire.



Leather Safety Gloves 90-99031

Thick and protective leather gloves with a soft inner lining. One size fits all.



Stove Top Thermometer 90-99120

Monitor the surface temperature of your stove to keep it burning within the optimal temperature range.



Draft Meter 90-99000

Measure the draft in your chimney. Proper draft is necessary for clean and efficient wood burning.



Draft Inducing Flue Collar 90-99099

Recommended for installations with poor draft, the draw collar heats up your chimney to ensure a proper draft. Fits 6" flue.



Finishes and Paint

Matte black spray cans for cast iron parts, filler and touch-up paint to match enamel, charcoal spray cans for HASE steel products, gas vent pipe paint to match your gas stove



Glass Hearth Pads

Recommended for our HASE stoves, these tempered glass pads provide ember protection.

Wood Fireplace Insert Accessories



Surround Additions

Accessories for the Clydesdale wood insert.




Steel Surrounds

Accessories for the Green Mountain wood inserts.



Installation Products

Accessories to improve and facilitate installation.



Fire Screens


Enjoy a direct view to the fire while containing sparks.

Wood ZC Fireplace Accessories




Hot Air Distribution Kits

Hot air is piped from the fireplace to vents installed in the wall. The vents can be placed independently in other rooms if desired.

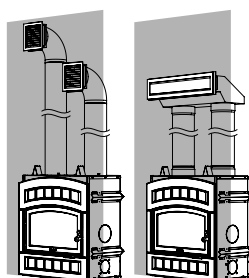

Forced Hot Air Kit

A blower moves hot air from the fireplace to other areas of the house. Insulated pipe with a maximum run of 50 feet is recommended.

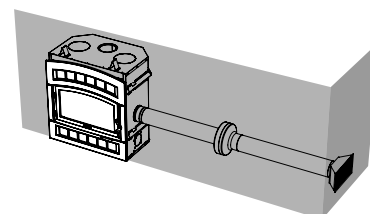

Gas Stove Accessories




Wall Touch Pad

For the Bristol or Waitsfield stoves. Wall-mounted on/off and adjust the flame height.



Remote Control Kit

For the Stowe or Champlain stoves. Hand-held on/off or automatic thermostat modes.

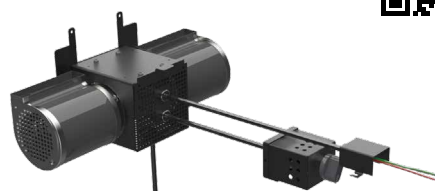

Convection Blower

For the Stowe or Champlain gas stoves, the convection blower turns on automatically. Adjust the rheostat to control the speed of the blower or turn it off.



www.hearthstonestoves.com

Hearthstone Quality Home Heating Products, Inc.
317 Stafford Avenue, Morrisville Vermont 05661
USA



www.hearthstoneoutdoor.com



www.hearthstonecookware.com