

INSTALLATION INSTRUCTIONS

BEK CAP EXTENSION BOX

CAUTION:
Edges are sharp! Hand protection is recommended.

Tools Needed
Safety Gloves
Phillips Screwdriver

Note: An arrow (➡) found in the text signifies change in content.

1. Bend one of the extension box sides into a box along the pre-punched, hand bent line. See Figure 1.
2. Screw the end pieces together with the two sheet metal screws provided.
3. Place the assembled box (Figure 2) over the framed opening in the wall so that the rectangular cutouts in the box flanges are facing away from the house. See Figure 3.
4. Drive four screws (provided with your termination cap) through the holes adjacent to the house wall to secure the extension box to the house.
5. With the direct vent pipe extending past the extension box, as described in the appliance installation instructions, assemble the cap to the pipe.
6. Place a bead of silicone caulk on the face of the extension box and place the termination cap onto the box.
7. Use four of the sheet metal screws provided to secure the termination cap.

Note: You can either trim the vertical flashing lip off the cap or bend it over.

8. Follow the installation instructions for the termination kit.

Please contact your Hearth & Home Technologies dealer with any questions or concerns you may have or call 1-800-927-6841 or 1-888-427-3973.

➡ **Note:** Brackets are included to mount one BEK to another BEK for thicker wall applications.

Note: This extension box and the termination cap must be properly flashed and sealed for the siding materials used.

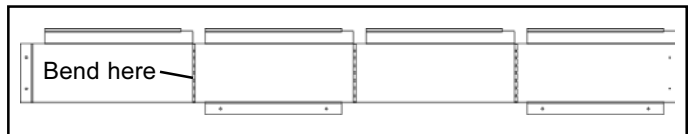


Figure 1 - BEK Extension Box - Blank

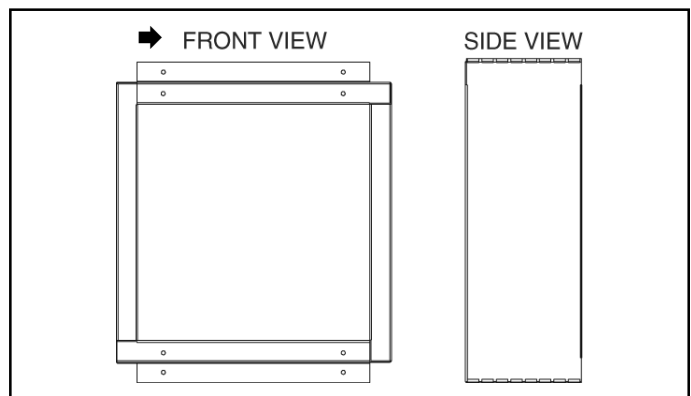


Figure 2 - BEK Extension Box - Assembled

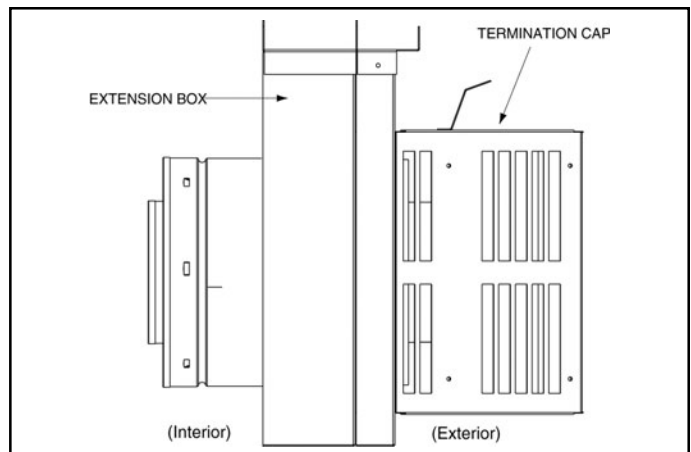


Figure 3 - BEK Extension Box - Installed